


PRO UNI-D CO., LTD.

PVC/P.P BALL VALVE

- Pressure rating: 150PSI @23°C
- Standard port design
- Adjustable seat tightness
- Easy to disassemble
- Less on-line down time for replacement /maintenance
- Actuator could be installed with inserted nut type

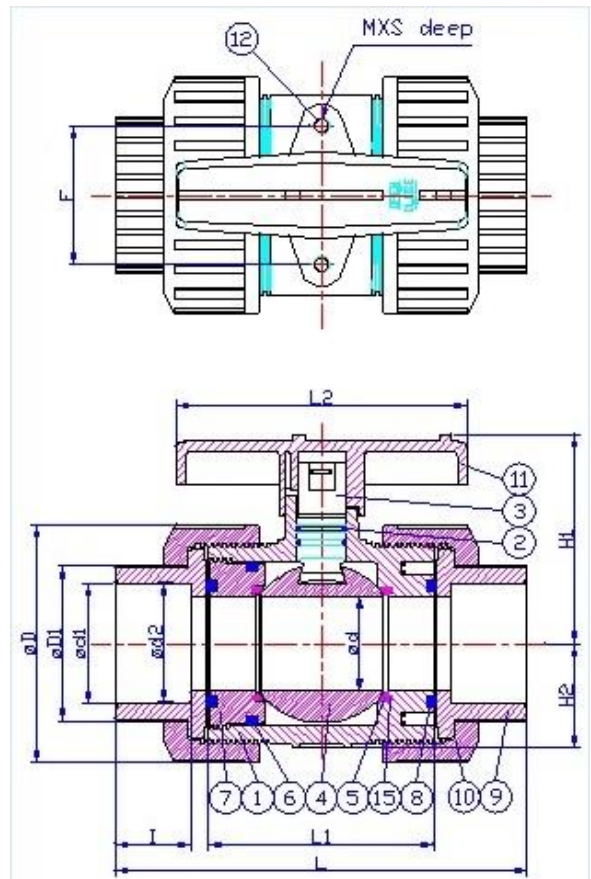

NO.	PART	MATERIAL	Q'TY
1	本體(BODY)	UPVC, CPVC, PP, PVDF, ABS	1
2	中心O環(STEM O-RING)	EPDM, FPM	2
3	中心柱(STEM)	UPVC, CPVC, PP, PVDF, ABS	1
4	球(BALL)	UPVC, CPVC, PP, PVDF, ABS	1
5	墊座(SEAT SEAL)	PTFE	2
6	內特普O環(CARRIER O-RING)	EPDM, FPM	1
7	內特普(SEAL CARRIER)	UPVC, CPVC, PP, PVDF, ABS	1
8	由令O環(UNION O-RING)	EPDM, FPM	2
9	外特普(END CONNECTOR)	UPVC, CPVC, PP, PVDF, ABS	2
10	螺帽(UNION NUT)	UPVC, CPVC, PP, PVDF, ABS	2
11	把手(HANDLE)	ABS, PP+GF, PP	1
12	本體埋銅(INSERTED NUT)	C3602	2.4
15	本體O環(BODY O-RING)	EPDM, FPM	2

PRO UNI-D CO., LTD.

SIZE	Standard	Material	Seat	O-ring	End type
1/2"~4"	ANSI,JIS,DIN,BS	PVC	PTFE	EPDM,FPM	Socket, Threaded, Flanged
1/2"~4"	ANSI,JIS,DIN,BS	CPVC	PTFE	EPDM,FPM	Socket, Threaded, Flanged
1/2"~4"	ANSI,JIS,DIN,BS	PVDF	PTFE	EPDM,FPM	Socket, Threaded, Flanged
1/2"~4"	ANSI,JIS,DIN,BS	PP	PTFE	EPDM,FPM	Socket, Threaded, Flanged
1/2"~4"	ANSI,JIS,DIN,BS	ABS	PTFE	EPDM,FPM	Socket, Threaded, Flanged

SIZE		1/2" (15mm)	3/4" (20mm)	1" (25mm)	1-1/4" (32mm)	1-1/2" (40mm)	2" (50mm)	2-1/2" (65mm)	3" (80mm)	4" (100mm)
JIS	d1	22.3	26.3	32.33	38.43	48.46	60.56	76.6	89.6	114.7
	d2	21.7	25.7	31.67	37.57	47.54	59.44	75.87	88.83	113.77
	I	22.2	25.4	28.6	31.8	34.9	38.1	61	63	69
ANSI	d1(UPVC)	21.54	26.87	33.65	42.42	48.56	60.63	73.38	89.31	114.76
	d1(CPVC)	21.54	26.87	33.65	42.42	48.56	60.63	73.38	89.28	114.73
	d2(UPVC)	21.23	26.57	33.27	42.04	48.11	60.17	72.85	88.7	114.07
	d2(CPVC)	21.23	26.57	33.27	42.04	48.11	60.17	72.85	88.67	114.04
	I	22.22	25.4	28.58	31.75	34.93	38.1	44.45	47.63	57.15
DIN	d1	20.3	25.3	32.3	40.3	50.3	63.3	75.35	90.35	110.6
	d2	19.9	24.9	31.9	39.9	49.9	62.9	74.9	89.9	109.9
	I	16	19	22	26	31	38	44	51	61
BS	d1	21.7	27.15	33.95	42.65	48.65	60.75	75.75	89.35	114.95
	d2	21	26.35	33.15	41.85	47.85	59.95	74.95	88.45	113.65
	I	22.22	25.4	28.58	31.75	34.93	38.1	44.45	47.63	57.15
thd./in	PT	14	14	11	11	11	11	11	11	11
	NPT	14	14	11.5	11.5	11.5	11.5	8	8	8
ØD		46.5	55	66	82	98	120	140	163	225
ØD1		31	37	45	54	65	79	92	108	146
Ød		13	18	23	30	38	48	61	69	99
L		114	135	149	168	175	208	275	304	332
L1		60	73	79	88	95	114	138	158	176
L2		78	92	100	110	121	147	180	224	278
H1		47	57	66	74	87	106	116	130	178
H2		21	26	33	39	41	53	-	-	-
S		8	8	11	11	11	15	-	-	-
F		30	33	40	47	52	70	-	-	-
M		M5	M6	M6	M8	M8	M8	-	-	-

(Unit : mm)