

PRO UNI-D CO., LTD.



• Electric Actuator Butterfly Valve

Size : 10 ~ 14"


Joint End : Flange (ANSI/CNS/DIN/JIS)

Working Pressure: 10" ~ 12" 90 PSI

SIZE	Specification				Speed(sec.)		Output Torque (kgf/cm)		
	POWER	AC110V	AC220V	DC24V	AC	DC	AC110V	AC220V	DC24V
10"	25W	0.6A	0.6A	N/A	30	N/A	3118	3320	N/A
UM-4	30W	N/A		0.3A	N/A	20	N/A		2500
12"	40W	0.9A	0.6A	N/A	30	N/A	4266	4873	N/A
UM-5									

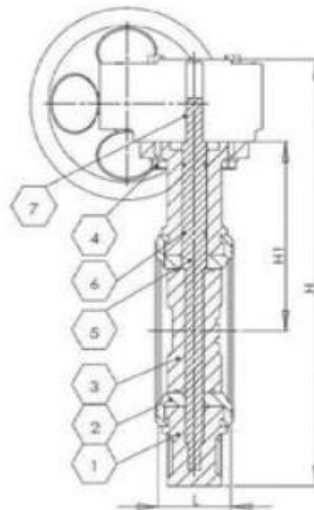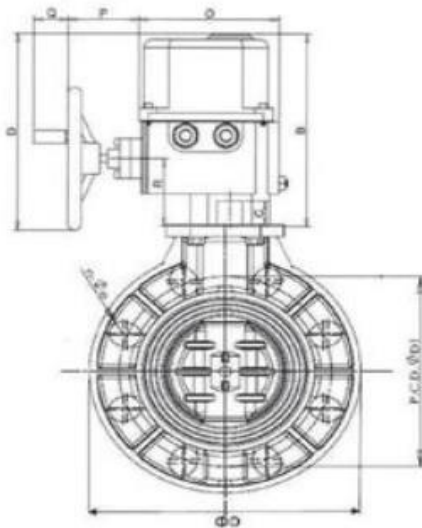

NO.	PART	MATERIAL	
1	BODY	UPVC/CPVC/FRPP	1
2	SEAT	EPDM/FPM	1
3	DISC	UPVC/CPVC/FRPP	1
4	SCREW	STEEL	4
5	STEM	SS304	1
6	O-RING	EPDM/FPM	2
7	CONNECTOR	STEEL	1

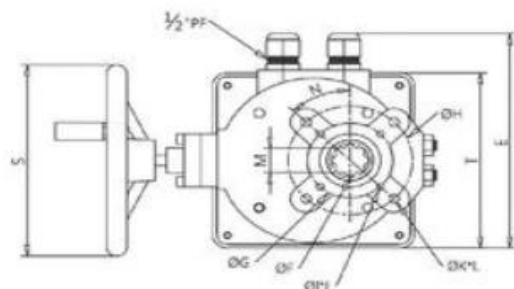

Unit: mm

Nom.	φ	P.C.D. φ D1			H1	n-φ e			L	D	Q	P	O	B	R	S	E	T
Size	D	DIN	ANSI	JIS		DIN	ANSI	JIS										
10"(250)	400	350	362	355	258	12*25	12*25	12*25	101	249	42	87	173	244	85	180	203	165
12"(300)	460	400	432	400	305	12*25	12*25	16*25	106	274	42	87	173	276	92	180	203	165
14"(350)	510	450	476	445	325	16*25	12*29	16*25	110	274	42	87	173	276	92	180	203	165